

Instructions on how to fit your replacement cable.

All repairs done at owners own risk.




1. Remove the hinge covers with a flat head screw driver



2. Remove both sides, to reveal the screw head as above




3. You will need 2 phillips head screwdrivers to remove the hinge pin

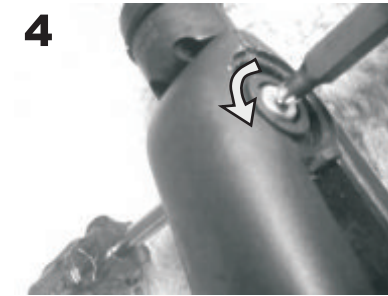


4. Firmly hold both drivers in place & turn one driver. This may be stiff.




5. You may find an electrical driver is easier, avoid damaging the screw

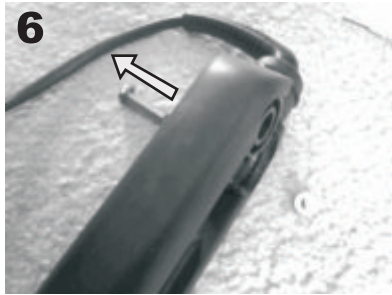

6. Now you can push the hinge pin through. Use a smaller driver for this.

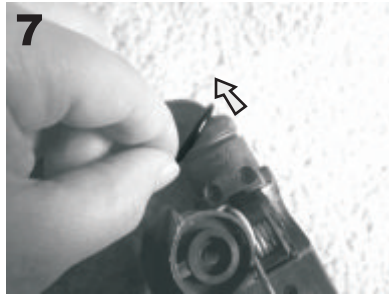

7. Now the barrel is split remove the rubber band from the back cover.

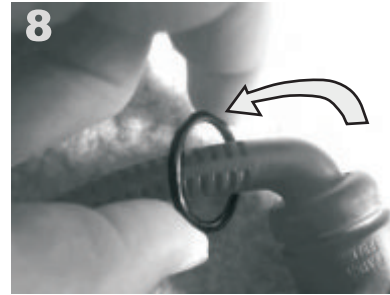


8. Keep the rubber band safe.




8. Now remove the back cover piece by removing the 2 cover screws.




10. This will now reveal the cable pin and connector.

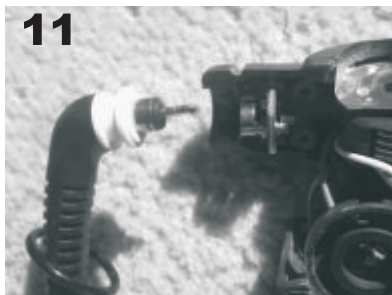

11. The old cable can now be removed from the barrel of the irons.

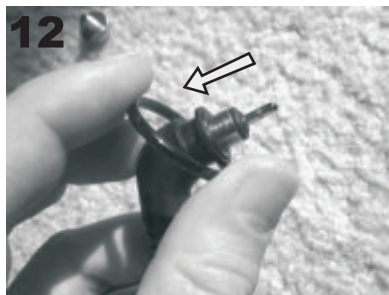

12. **Important** before fitting the new cable put the rubber band on the wire.

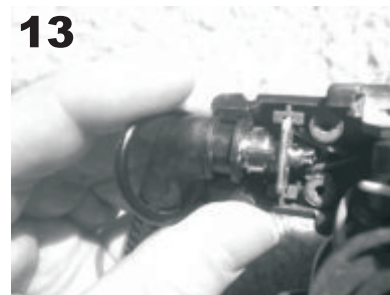


13. Fix the new cable pin to your connector.



14. Screw the cover plate back over the pin and connector.



15. Push the two sections of the barrel back together.

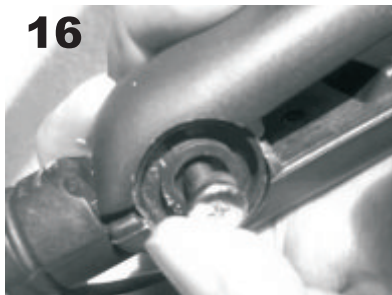

16. Push the hinge pin back through




17. Then push the other hinge screw back in place.



18. Again using 2 screwdrivers, tighten the hinge pin until secure.



19. Replace the 2 hinge covers back to cover the screws.

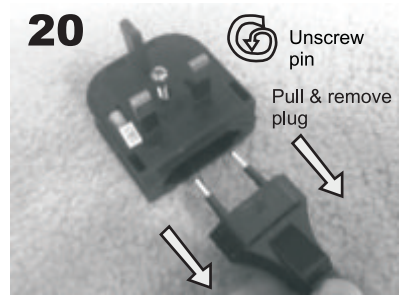

20. If swapping the plug from your old irons then this can be done easily.